



STANDARD LUBRICATION




UNITS K45R TO K85R ARE SUPPLIED WITH SYNTHETIC OIL, PROVIDING "LONG LIFE" LUBRICATION FOR THE MOUNTING POSITIONS B8 - B3 - V5 - V6 (FOR B6 - B7 SPECIFY IN THE ORDER).

* Standard Kel-Tech Oil Type

Agip	TEMPERATURE			DIN 51517-3 ISO 12925-1	
	-122 ^F	+32 ^F	+176 ^F		
Telium VSF 320 *	-22 ^F		+176 ^F		synthetic
Telium VSF 150	-31 ^F		+158 ^F		synthetic
Shell					
Omala HD320	-13 ^F		+122 ^F		synthetic
Cassida HF 46	-40 ^F		+32 ^F	⚙️	synthetic
Cassida Fluid GL460	+14 ^F		+122 ^F	🍴	synthetic
Esso					
Spartan Synthetic EP 320	-13 ^F		+122 ^F		synthetic
KLÜBER LUBRICATION					
Klubersynth EG 4-320	-13 ^F		+122 ^F		synthetic
Kluber Summit HySyn FG 46	-40 ^F		+32 ^F	⚙️	synthetic
Kluberoil 4 UH1-220 N	-4 ^F		+104 ^F	🍴	synthetic

⚙️ Low temperature
🍴 For foods

• Standard mounting positions

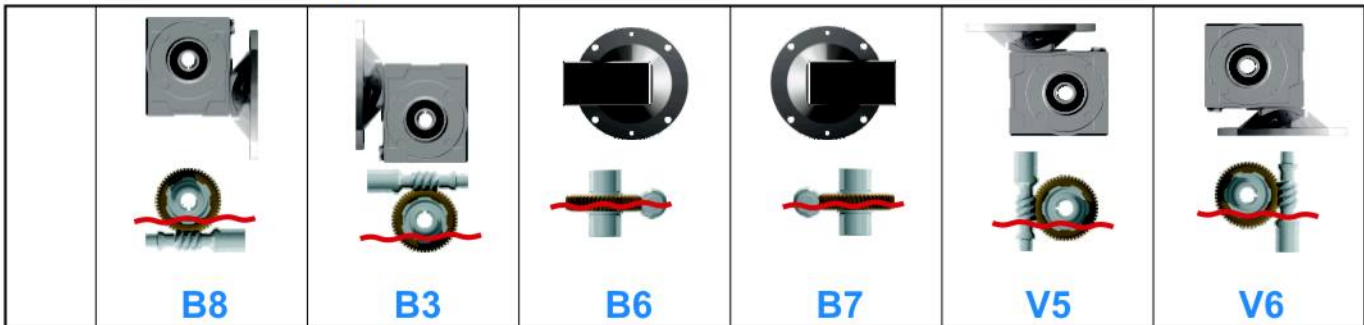

OIL QUANTITY FOR EVERY POSITION (OUNCES)						
K45R	8.45	8.45	8.45	8.45	8.45	8.45
K50R	13.4	13.4	13.4	13.4	13.4	13.4
K63R	34.5	34.5	24.3 [▪]	24.3 [▪]	34.5	34.5
K85R	73.9	73.9	52.8 [▪]	52.8 [▪]	73.9	73.9

[▪] Subtract from the standard Qty or order complete.



Oil plug for oil removal